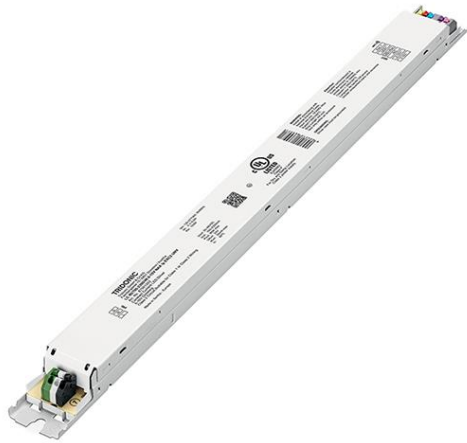


Driver LC 85W 700–2300mA 0-10V NAX Ip EXC2 UNV

Linear excite NFC series (US applications)

**Product description**

- _ Constant current LED driver
- _ Dimmable via 0 ... 10 V interface (incl. stand-by)
- _ Dimming range 1 – 100 % (incl. stand-by)
- _ UL8750 with class 2 output based on UL1310
- _ UL Listed Class P
- _ FCC Part 15 Class A
- _ Adjustable output current between 700 and 2,300 mA via NFC
- _ Max. output power 85 W
- _ Up to 87.7 % efficiency
- _ Ambient temperature: -25 ... +55 °C
- _ Meets Strictest Flicker Free Performance Standards
- _ Nominal lifetime up to 100,000 h
- _ 5 years guarantee (conditions at <https://www.tridonic.com/manufacture-guarantee-conditions>)

Housing properties

- _ Casing: metal, white
- _ Type of protection IP20
- _ Dry and damp location

Functions


- _ Adjustable output current in 1-mA-steps (NFC)
- _ 24 V AUX output
- _ Fade-off time programmable
- _ Protective features (overtemperature, short-circuit, overload, no-load, input voltage range)

Benefits

- _ Operating window for maximum compatibility
- _ Added energy savings with dimming via 0 ... 10 V interface
- _ Configurable via NFC
- _ Meets California Title 24
- _ Tailor your dimming response with either Linear, Logarithmic or Square Dimming Curves

Typical applications

- _ For linear/area lighting in office, education, healthcare, and general lighting applications

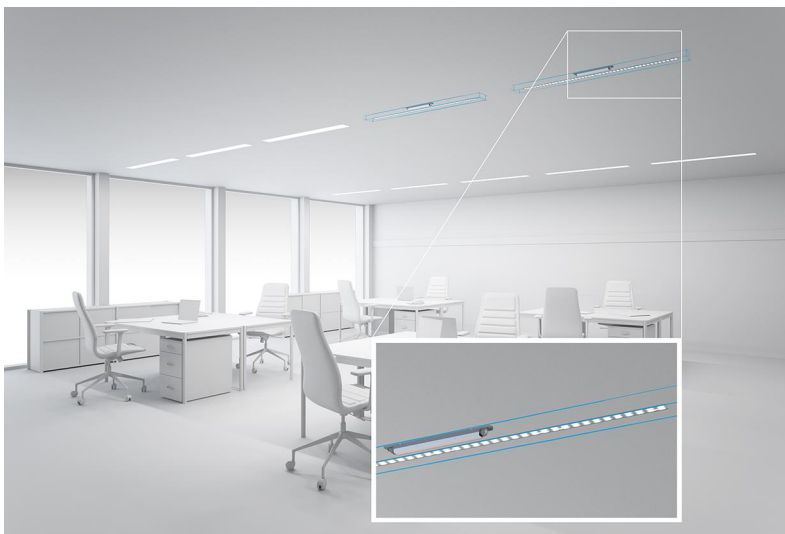Website
<http://www.tridonic.com/87501202>


Spotlights



Downlights



Linear



Area



Floor | Wall



Free-standing



Street




Decorative



High bay

Driver LC 85W 700–2300mA 0-10V NAX Ip EXC2 UNV
Linear excite NFC series (US applications)

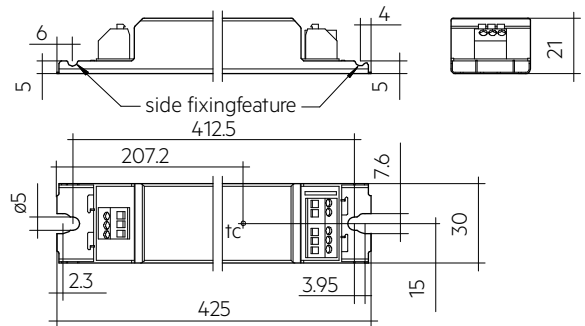

Ordering data

Type	Article number	Packaging, carton	Packaging, pallet	Weight per pc.
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV	87501202	10 pc(s).	910 pc(s).	0.28 kg

Technical data

Rated supply voltage	120 – 277 V
AC voltage range	108 – 305 V
Mains frequency	50 / 60 Hz
Typ. current (at 120 V, 60 Hz, full load) ^{①②}	820 mA
Typ. current (at 277 V, 60 Hz, full load) ^{①②}	370 mA
Leakage current (at 120 V, 60 Hz, full load) ^{①②}	< 750 µA
Leakage current (at 277 V, 60 Hz, full load) ^{①②}	< 750 µA
Max. input power (at 120 V, 60 Hz, full load)	99 W
Max. input power (at 277 V, 60 Hz, full load)	95 W
Typ. efficiency (at 120 V, 60 Hz, full load) ^②	84.7 %
Typ. efficiency (at 277 V, 60 Hz, full load) ^②	87.7 %
λ (at 120 V, 60 Hz, full load) ^①	0.99
λ (at 277 V, 60 Hz, full load) ^①	0.94C
Typ. power consumption on stand-by (at 120 V, 60 Hz) ^③	< 0.5 W
Typ. power consumption on stand-by (at 277 V, 60 Hz) ^③	< 0.5 W
Typ. input current in no-load operation (at 120 V, 60 Hz)	18 mA
Typ. input current in no-load operation (at 277 V, 60 Hz)	32 mA
Typ. input power in no-load operation (at 120 V, 60 Hz)	0.5 W
Typ. input power in no-load operation (at 277 V, 60 Hz)	1 W
In-rush current (peak / duration at 120 V)	7 A / 26 µs
In-rush current (peak / duration at 277 V)	20 A / 22 µs
THD (at 120 V, 60 Hz, full load) ^①	< 10 %
THD (at 277 V, 60 Hz, full load) ^①	< 20 %
Starttime (at 120V, 60 Hz, full load) ^①	≤ 500 ms
Starttime (at 277V, 60 Hz, full load) ^①	≤ 500 ms
Turn off time at full load	< 30 ms
Hold time (power failure, full load)	< 20 ms
Output current tolerance ^{①④}	± 5 %
Max. output current peak (non-repetitive)	≤ output current + 5 %
Output LF current ripple (< 120 Hz)	± 5 %
Output P_ST_LM (at full load)	≤ 1
Output SVM (at full load)	≤ 0.4
Max. output voltage (U-OUT)	60 V
Dimming range	1 – 100 %
Mains surge capability (between L - N)	2 kV
Mains surge capability (between L/N - PE)	2.5 kV
Surge voltage at output side (against PE)	500 V
Type of protection	IP20
Lifetime	up to 100,000 h
Guarantee (conditions at www.tridonic.com)	5 Year(s)
Dimensions L x W x H	425 x 30 x 21 mm

Approval marks**Standards**

UL 8750, CSA C22.2, FCC PART 15

Specific technical data

Type	Output current ^①	Min. output voltage	Max. output voltage	Max. output power (at 120 V, 60 Hz, full load)	Typ. power consumption (at 120 V, 60 Hz, full)	Typ. current consumption (at 120 V, 60 Hz, full)	Typ. power consumption (at 277 V, 60 Hz, full)	Typ. current consumption (at 277 V, 60 Hz, full)	t _c point max.	Ambient temperature t _a
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV	700 mA	20 V	48.0 V	33.6 W	37.4 W	319 mA	38.3 W	173 mA	65 °C	-25 ... +55 °C
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV	800 mA	20 V	48.0 V	38.4 W	43.5 W	367 mA	44.9 W	191 mA	65 °C	-25 ... +55 °C
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV	900 mA	20 V	48.0 V	43.2 W	48.6 W	409 mA	48.7 W	203 mA	65 °C	-25 ... +55 °C
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV	1,000 mA	20 V	48.0 V	48.0 W	53.7 W	452 mA	53.6 W	219 mA	65 °C	-25 ... +55 °C
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV	1,100 mA	20 V	48.0 V	52.8 W	58.7 W	493 mA	58.2 W	235 mA	65 °C	-25 ... +55 °C
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV	1,200 mA	20 V	48.0 V	57.6 W	65.4 W	550 mA	64.5 W	257 mA	65 °C	-25 ... +55 °C
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV	1,300 mA	20 V	48.0 V	62.4 W	69.8 W	584 mA	68.9 W	271 mA	65 °C	-25 ... +55 °C
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV	1,400 mA	20 V	48.0 V	67.2 W	75.2 W	631 mA	73.8 W	287 mA	70 °C	-25 ... +55 °C
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV	1,500 mA	20 V	48.0 V	72.0 W	81.6 W	684 mA	79.1 W	306 mA	70 °C	-25 ... +55 °C
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV	1,600 mA	20 V	48.0 V	76.8 W	86.0 W	720 mA	83.8 W	322 mA	70 °C	-25 ... +55 °C
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV	1,700 mA	20 V	48.0 V	81.6 W	91.3 W	764 mA	89.0 W	340 mA	75 °C	-25 ... +55 °C
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV	1,800 mA	20 V	47.2 V	85.0 W	95.6 W	800 mA	92.8 W	353 mA	75 °C	-25 ... +55 °C
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV	1,900 mA	20 V	44.7 V	85.0 W	97.8 W	818 mA	95.5 W	362 mA	75 °C	-25 ... +55 °C
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV	2,000 mA	20 V	42.5 V	85.0 W	97.9 W	812 mA	94.2 W	358 mA	80 °C	-25 ... +55 °C
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV	2,100 mA	20 V	40.5 V	85.0 W	98.0 W	814 mA	94.8 W	360 mA	80 °C	-25 ... +55 °C
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV	2,200 mA	20 V	38.6 V	85.0 W	98.2 W	817 mA	94.4 W	358 mA	85 °C	-25 ... +55 °C
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV	2,300 mA	20 V	37.0 V	85.0 W	98.3 W	814 mA	95.0 W	361 mA	85 °C	-25 ... +55 °C

① Valid at 100 % dimming level.

② Depending on the selected output current.

③ No-load on AUX power supply.

④ Output current is mean value.

⑤ The table only lists a number of possible operating points but does not cover each single point. The output current can be set within the total value range in 1-mA-steps. Output current is mean value.

1. Standards

UL 8750
CSA C22.2
FCC Part 15, Class A

Product not designed for European Economic Area.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

2. Thermal details and lifetime

2.1 Expected lifetime

Expected lifetime 120 V

Type	Output current	ta	45 °C / 113 °F	50 °C / 122 °F	55 °C / 131 °F
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV	700 – 1,300 mA	tc	55 °C / 131 °F	60 °C / 140 °F	65 °C / 149 °F
		Lifetime	> 100,000 h	> 100,000 h	> 100,000 h
	>1,300 – 1,600 mA	tc	60 °C / 140 °F	65 °C / 149 °F	70 °C / 158 °F
		Lifetime	> 100,000 h	> 100,000 h	> 100,000 h
	>1,600 – 1,900 mA	tc	65 °C / 149 °F	70 °C / 158 °F	75 °C / 167 °F
		Lifetime	> 100,000 h	> 100,000 h	95,000 h
	>1,900 – 2,100 mA	tc	70 °C / 158 °F	75 °C / 167 °F	80 °C / 176 °F
		Lifetime	> 100,000 h	95,000 h	70,000 h
	2,200 mA	tc	75 °C / 167 °F	80 °C / 176 °F	85 °C / 185 °F
		Lifetime	95,000 h	70,000 h	50,000 h
	2,300 mA	tc	75 °C / 167 °F	80 °C / 176 °F	85 °C / 185 °F
		Lifetime	80,000 h	55,000 h	50,000 h


Expected lifetime 277 V

Type	Output current	ta	45 °C / 113 °F	50 °C / 122 °F	55 °C / 131 °F
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV	1,200 – 1,300 mA	tc	55 °C / 131 °F	60 °C / 140 °F	65 °C / 149 °F
		Lifetime	> 100,000 h	> 100,000 h	> 100,000 h
	>1,300 – 1,600 mA	tc	60 °C / 140 °F	65 °C / 149 °F	70 °C / 158 °F
		Lifetime	> 100,000 h	> 100,000 h	> 100,000 h
	>1,600 – 1,900 mA	tc	65 °C / 149 °F	70 °C / 158 °F	75 °C / 167 °F
		Lifetime	> 100,000 h	> 100,000 h	> 100,000 h
	>1,900 – 2,100 mA	tc	70 °C / 158 °F	75 °C / 167 °F	80 °C / 176 °F
		Lifetime	> 100,000 h	> 100,000 h	> 100,000 h
	2,200 mA	tc	75 °C / 167 °F	80 °C / 176 °F	85 °C / 185 °F
		Lifetime	> 100,000 h	> 100,000 h	75,000 h
	2,300 mA	tc	75 °C / 167 °F	80 °C / 176 °F	85 °C / 185 °F
		Lifetime	85,000 h	55,000 h	50,000 h

The LED driver is designed for a lifetime stated above under reference conditions and with a failure probability of less than 10 %.

3. Installation / wiring

3.1 Circuit diagram

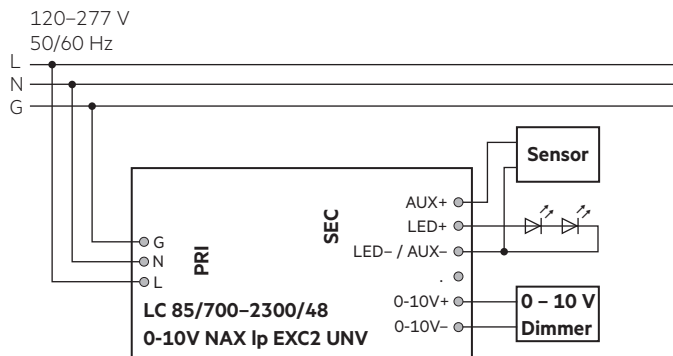


Class 2 Circuit, Suitable for Class 1 or Class 2 wiring only.

3.2 Wiring type and cross section


For wiring use stranded wire with ferrules or solid wire from 0.2 – 1.5 mm² (AWG24 – 16). Strip 8.5–9.5 mm (3/8 inch) of insulation from the cables to ensure perfect operation of the push-wire terminals. Use one wire for each terminal connector only.

LED module/LED driver/supply



3.3 Loose wiring

Press down the “push button” and remove the cable from front.



3.4 Wiring guidelines

- Run the secondary lines separately from the mains connections and lines to achieve good EMC performance.
- The max. secondary cable length (AUX, LED) is 2 m (4 m circuit).
- For good EMC performance, keep the LED wiring as short as possible.
- Secondary switching is not permitted.
- The LED driver has no inverse-polarity protection on the secondary side. Wrong polarity can damage LED modules with no inverse-polarity protection.
- Wrong wiring of the LED driver can lead to malfunction or irreparable damage.
- To avoid damage of the Driver, the wiring must be protected against short circuits to earth (sharp edged metal parts, metal cable clips, louver, etc.).

3.5 Hot plug-in

Hot plug-in is not supported due to residual output voltage of > 0 V. This can damage the LED load.

When connecting an LED load, restart the device to activate the LED output. This can be done via mains reset.

When used in conjunction with a self-contained emergency LED driver the emergency device must break the mains supply to the driver during the test mode/emergency mode (delayed mains supply of the LED driver at mains return) to prevent hot plug-in of the LED load.

3.6 Earth connection


The earth connection is conducted as protection earth (PE). If the LED Driver will be earthed, protection earth (PE) has to be used. There is no earth connection required for the functionality of the LED driver. Earth connection is recommended to improve following behaviour:

- Electromagnetic interferences (EMI)
- Transmission of mains transients to the LED output

In general it is recommended to earth the LED driver if the LED module is mounted on earthed luminaire parts respectively heat sinks and thereby representing a high capacity against earth.

4. Electrical values

4.1 Operating window

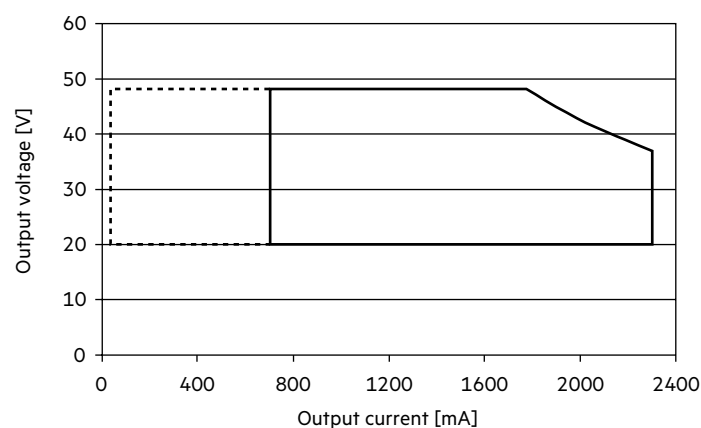


— Operating window 100 %
 - - - - - Operating window dimmed


Make sure that the LED driver is operated within the given window under all operating conditions. Special attention needs to be paid at dimming as the forward voltage of the connected LED modules varies with the dimming level, due to the implemented amplitude dimming technology. Coming below the specified minimum output voltage of the LED driver may cause the device to shut-down.

4.2 Efficiency vs load

120 V, 60 Hz:

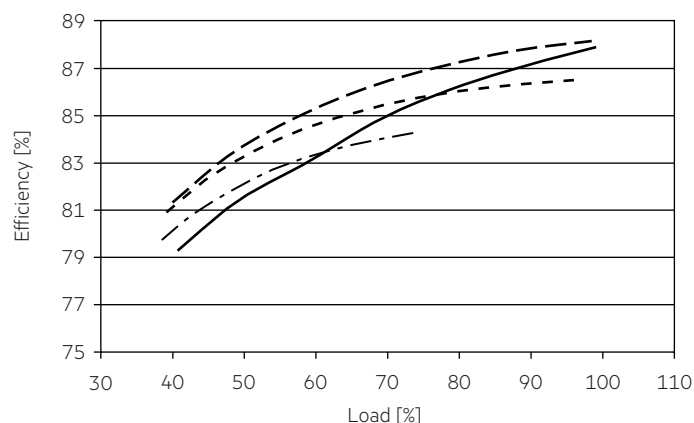


277 V, 60 Hz:

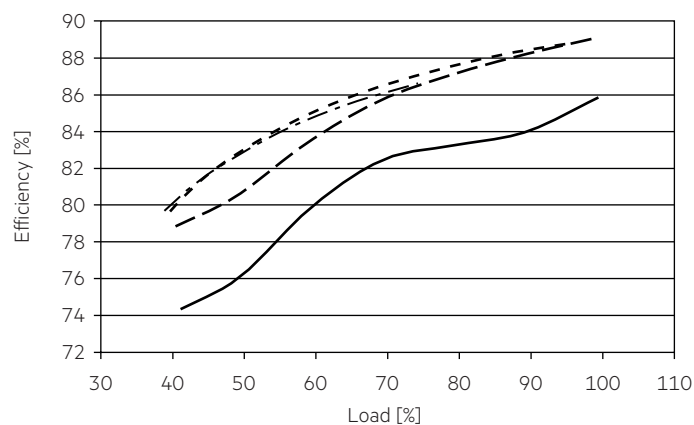



No-load on AUX power supply.

4.3 Power factor vs load

120 V, 60 Hz:

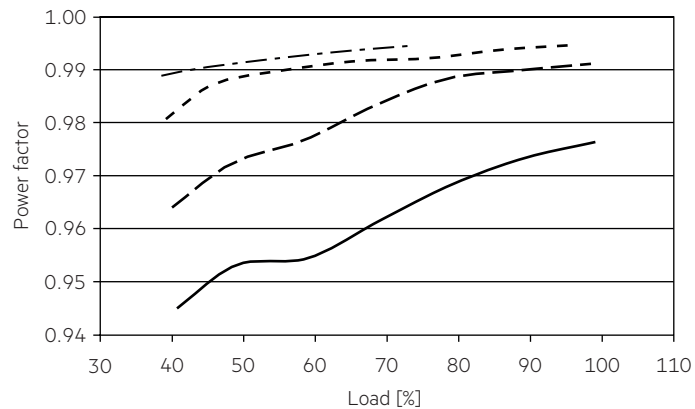


277 V, 60 Hz:

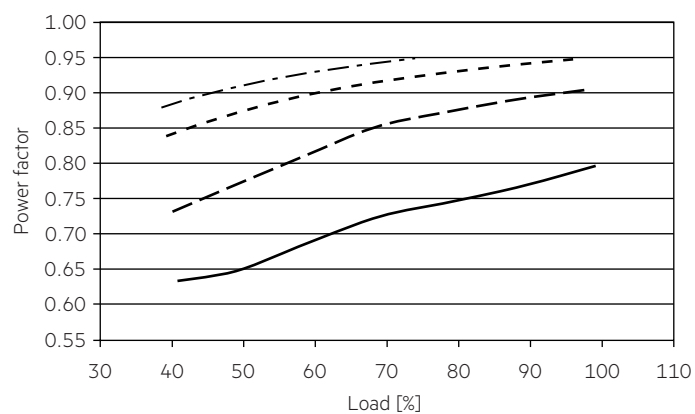


100 % load corresponds to the max. output power (full load) according to the table on page 3.

4.4 THD vs load (without harmonic < 5 mA or 0.6 % of the input current)

120 V, 60 Hz:

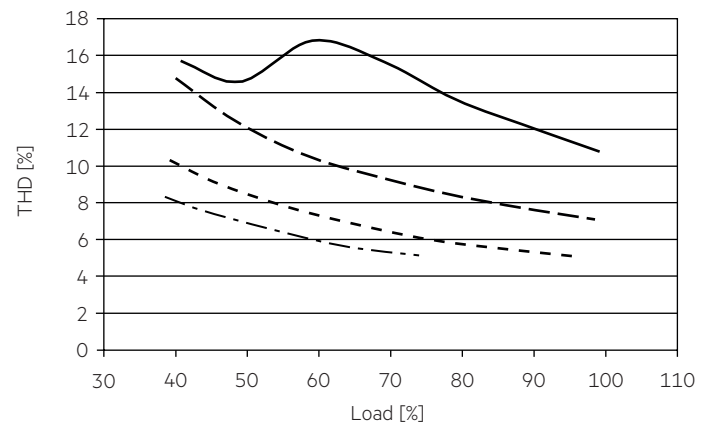

277 V, 60 Hz:

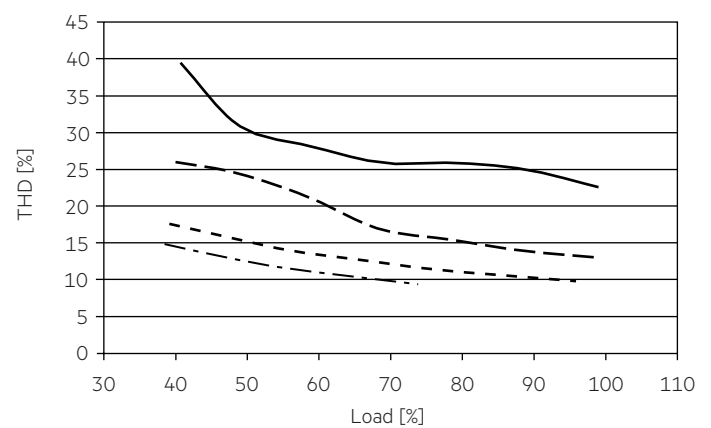

4.5 Maximum loading of automatic circuit breakers in relation to inrush current

120 V, 60 Hz:

Automatic circuit breaker type	C10	C13	C16	C20	B10	B13	B16	B20	Inrush current	
Installation Ø	1.5 mm ² / AWG16	1.5 mm ² / AWG16	2.5 mm ² / AWG14	2.5 mm ² / AWG14	1.5 mm ² / AWG16	1.5 mm ² / AWG16	2.5 mm ² / AWG14	2.5 mm ² / AWG14	I_{\max}	time
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV									7 A	26 µs

277 V, 60 Hz:

Automatic circuit breaker type	C10	C13	C16	C20	B10	B13	B16	B20	Inrush current	
Installation Ø	1.5 mm ² / AWG16	1.5 mm ² / AWG16	2.5 mm ² / AWG14	2.5 mm ² / AWG14	1.5 mm ² / AWG16	1.5 mm ² / AWG16	2.5 mm ² / AWG14	2.5 mm ² / AWG14	I_{\max}	time
LC 85/700-2300/48 0-10V NAX Ip EXC2 UNV									20 A	22 µs

These are max. values calculated out of continuous current running the device on full load.

There is no limitation due to inrush current.

If load is smaller than full load for calculation only continuous current has to be considered.

4.6 Dimming

Dimming range is 1 to 100%.

The operating window shows the minimum reachable power in dimmed state.

4.7 Dimming characteristics

Control input (0 – 10 V)


Control input open	max. dimming level
Interface current range	120 µA ± 3 %
Max. permitted input voltage	± 16 V
Voltage range dimming	0 – 10 V ^①
Input voltage = 0 V	stand-by
Input voltage < 1 V	min. dimming level ^①
Input voltage > 10 V	max. dimming level ^①

Interface supports source and sink dimmers.

The 0 – 10 V interface is electrically isolated.

0 – 10 V Dimming: Class 2 circuit, suitable for Class 1 or Class 2 wiring.


^① See graph below (at full load):

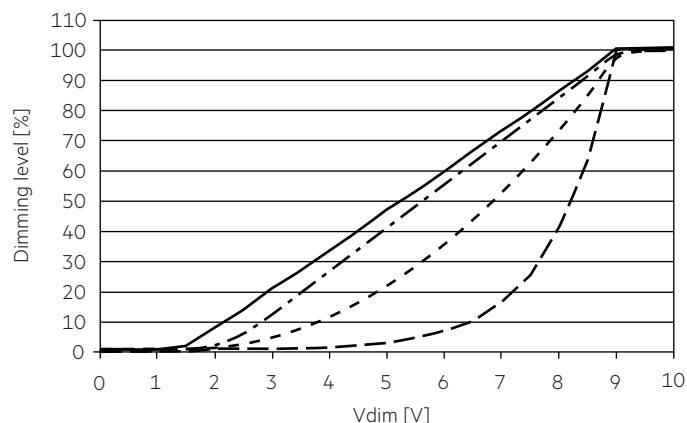

- Linear dimming curve (default)
- Logarithmic dimming curve
- Square dimming curve
- . - . - Linear with softstart dimming

Dimming profiles programmable via NFC.

Part of the Dim to OFF detail, measured at 2,300 mA:

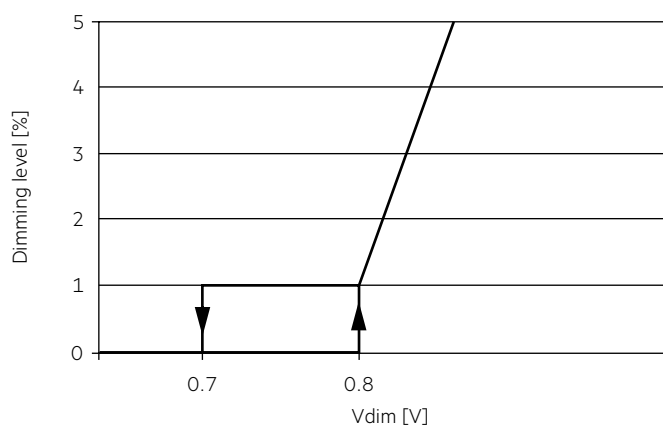

4.8 Insulation between terminals

Insulation	Mains	AUX	–LED / +LED	0–10V
Mains	–	double	double	double
AUX	double	–	–	basic
–LED / +LED	double	–	–	basic
0–10V	double	basic	basic	–

basic ... represents basic insulation.

double ... represents double or reinforced insulation.

5. Software / Programming / Interfaces

5.1 Software / programming

With appropriate software and interface different functions can be activated and various parameters can be configured in the LED driver. The Driver supports the following software and interfaces:

Software / hardware for configuration:

- companionSUITE (deviceGENERATOR, deviceCONFIGURATOR, deviceANALYSER)

Interfaces for data transfer:

- NFC

5.2 Nearfield communication (NFC)

The NFC Interface allows wireless communication with the LED driver. This interface offers the option to write configuration and to read configuration, errors and events with the companionSUITE. A correct communication between the LED driver and the NFC antenna can only be guaranteed if the Driver is directly placed on the antenna. Any material placed between the LED driver and the NFC antenna can cause a deterioration of the communication quality. We recommend the use of following NFC antennas: www.tridonic.com/nfc-readers

NFC is compliant with ISO/IEC 15693 standard.







Changing parameters via NFC shall be done by qualified engineers only.

6. Functions

⊙ companionSUITE:

NFC

The companionSUITE with deviceGENERATOR, deviceCONFIGURATOR and deviceANALYSER is available via our WEB page: <https://www.tridonic.com/com/en/products/companionsuite.asp>

Icon	Function	NFC
	OEM Identification	⊙
	OEM GTIN	⊙
	LED current	⊙
	Dimming curve (0-10V)	⊙
	Minimum level (0-10V)	⊙
	Fade-off time (0-10V)	⊙

6.1 LED current



The LED output current must be adapted to the connected LED module. The value is limited by the current range of the respective device.

6.2 Integrated auxiliary power supply (AUX)



Auxiliary power supply to connect external sensor.
For wiring see circuit diagram.
Output voltage: 16 – 25 V
Output current: 50 mA max.
AUX port is active in stand-by mode.

6.3 EM Operation

To ensure proper emergency lighting compatibility, it's recommended that installers test the Tridonic LED drivers with the selected EM converters to ensure they operate as a suitable functioning emergency lighting system. For reliable performance the self-contained emergency LED driver/device must break the mains supply to the driver during the test mode/emergency mode (delayed mains supply of the driver at mains return) to prevent hot plug-in of the LED load.

For more information on compatibility or if you are unsure, please do not hesitate to contact Tridonic.

7. Protective features

7.1 Short-circuit behaviour

In case of a short-circuit at the LED output the LED output is switched off. After restart of the LED driver the output will be activated again. The restart can be done via mains reset.

7.2 No-load operation

The LED driver will not be damaged in no-load operation. The output will be deactivated and is therefore free of voltage. If a LED load is connected the device has to be restarted before the output will be activated again.

7.3 Overload protection

If the maximum load is exceeded by a defined internal limit, the LED driver turns off the LED output. After restart of the LED driver the output will be activated again. The restart can be done via mains reset.

7.4 Overtemperature protection

The LED driver is protected against temporary thermal overheating. Thermal overload protection is triggered if the maximum T_c temperature is exceeded by around 5 to 10 °C (see page 3) and the output current is reduced. As soon as the device has cooled down, it returns to the set output current.

8. Miscellaneous

8.1 Insulation and electric strength testing of luminaires

Electronic devices can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to UL 8750 (informative only!) each luminaire should be submitted to an insulation test with 500 V_{DC}. The dielectric withstand test equipment shall employ a transformer of 500-VA or larger capacity and have a variable output voltage that is essentially sinusoidal or continuous direct current. The applied potential is to be increased from zero at a substantially uniform rate until the required test level is reached, and is to be held at that level for 1 minute.

As an alternative, UL8750 (informative only!) describes a test of the electrical strength with 2V AC + 1000V (or 1.414 x V DC). To avoid damage to the electronic devices this test must not be conducted.

8.2 Conditions of use and storage

Humidity: 5 % up to max. 85 %,
not condensed
(max. 56 days/year at 85 %)

Storage temperature: -40 °C up to max. +80 °C

The devices have to be acclimatised to the specified temperature range (t_a) before they can be operated.

The LED driver is declared as inbuilt LED controlgear, meaning it is intended to be used within a luminaire enclosure.

If the product is used outside a luminaire, the installation must provide suitable protection for people and environment (e.g. in illuminated ceilings).

8.3 Maximum number of switching cycles

All LED driver are tested with 50,000 switching cycles.
The actually achieved number of switching cycles is significantly higher.

8.4 Additional information

Additional technical information at www.tridonic.com → Technical Data

Lifetime declarations are informative and represent no warranty claim.
No warranty if device was opened.