


TALEXdriver 0010 K001 12/24V
LCU indoor IP20



Product description
_ Constant voltage LED Driver
_ Constant output voltage

Properties
_ Compact dimensions
_ Overtemperature and overload protection with power regulation
_ Short-circuit protection with automatic restart
_ Type of protection IP20
_ Casing: nylon natural white 66
_ Connecting cable, supply side: H03VV-F, H05VV-F (length approx. 140 mm)
_ Connection: cable with end sleeves (length approx. 200 mm)


Website
<http://www.tridonic.com/86453116>

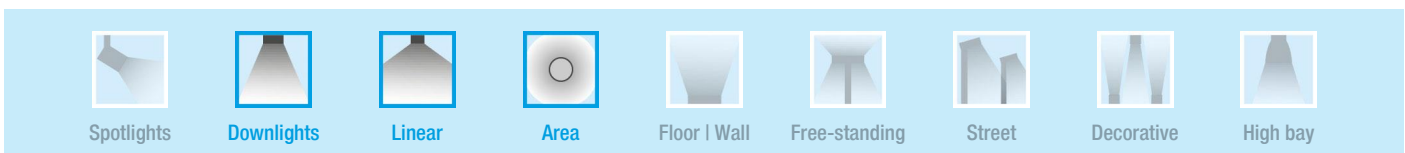

TALEXdriver 0010 K001 12/24V

LCU indoor IP20

The complete data sheet for this product is available in the Downloads section.

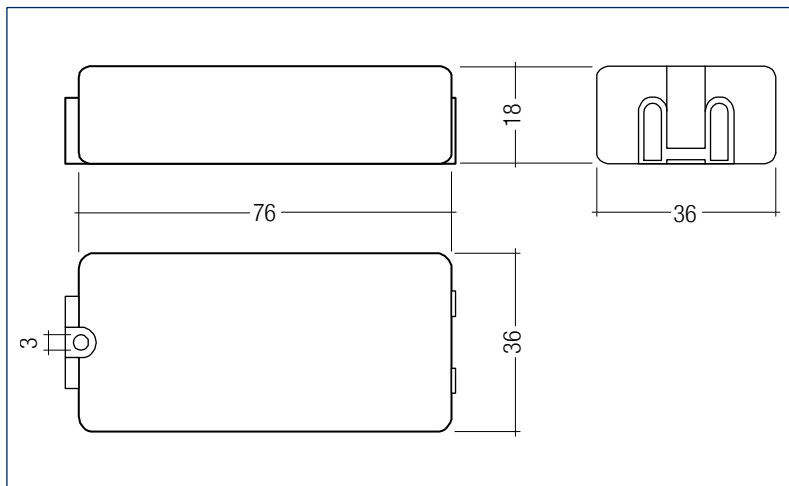**Ordering data**

Type	Article number	Secondary voltage DC	Packaging, carton	Weight per pc.
0010 K001 12 V	86453116	12 V	40 pieces	0.048 kg

Technical data

Rated supply voltage	220 – 240 V
AC voltage range	198 – 254 V
DC voltage range	176 – 280 V
Mains frequency	0 / 50 / 60 Hz
Efficiency	> 60 %
Line regulation	< 1 %
Load regulation	< 5 %
Ambient temperature t_a	-25 ... +50 °C
Dimensions L x W x H	76 x 36 x 18 mm

Approval marks**Standards**

EN 55015, EN 61000-3-2, EN 61347-1, EN 61347-2-13, EN 61547, EN 62384

Specific technical data

Type	Output power	Rated current (at 230 V, 50 Hz)	Max. casing temperature t_c
0010 K001 12 V	1 – 10 W	93 mA	70 °C