

TALEXdriver 0010 K001 12/24V
LCU indoor IP20



Product description


- _ Constant voltage LED Driver
- _ Constant output voltage

Properties

- _ Compact dimensions
- _ Overtemperature and overload protection with power regulation
- _ Short-circuit protection with automatic restart
- _ Type of protection IP20
- _ Casing: nylon natural white 66
- _ Connecting cable, supply side: H03VV-F, H05VV-F (length approx. 140 mm)
- _ Connection: cable with end sleeves (length approx. 200 mm)

Website


<http://www.tridonic.com/86453122>

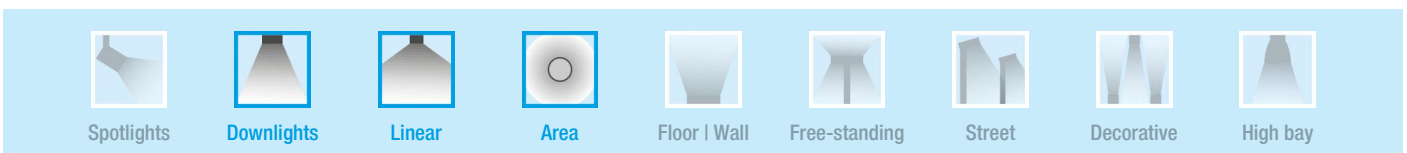

TALEXdriver 0010 K001 12/24V

LCU indoor IP20

The complete data sheet for this product is available in the Downloads section.

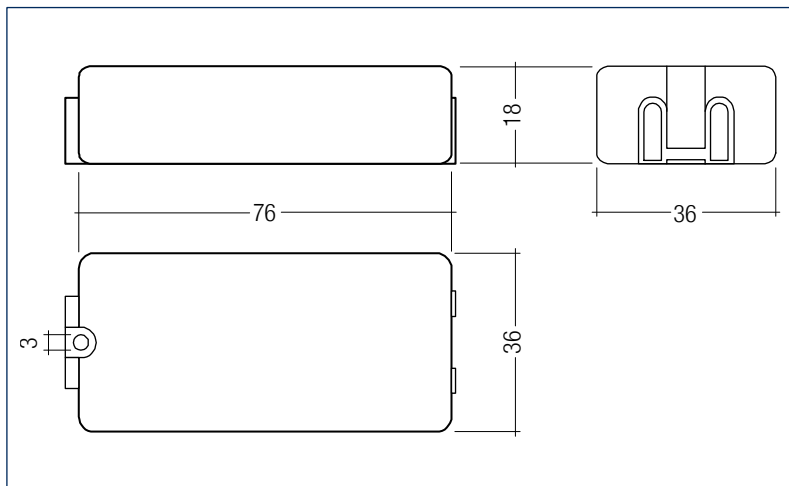**Ordering data**

Type	Article number	Secondary voltage DC	Packaging, carton	Weight per pc.
0010 K001 24 V	86453122	24 V	40 pieces	0.046 kg

Technical data

Rated supply voltage	220 – 240 V
AC voltage range	198 – 254 V
DC voltage range	176 – 280 V
Mains frequency	0 / 50 / 60 Hz
Efficiency	> 60 %
Line regulation	< 1 %
Load regulation	< 5 %
Ambient temperature t_a	-25 ... +50 °C
Dimensions L x W x H	76 x 36 x 18 mm

Approval marks**Standards**

EN 55015, EN 61000-3-2, EN 61347-1, EN 61347-2-13, EN 61547, EN 62384

Specific technical data

Type	Output power	Rated current (at 230 V, 50 Hz)	Max. casing temperature t_c
0010 K001 24 V	1 – 10 W	95 mA	65 °C