

T5 FHO Luxline Plus

54W/T5/865 FHO

0002783



Product features



PRODUCT OVERVIEW

Product name	54W/T5/865 FHO
Technology	Fluorescent
Watt (Rated) (W)	54
Lamp shape	Tube, double-ended
Type	T5 FHO Luxline Plus
Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4944508
E-number SE	8356562
E-number Norway	3800989
Luminous flux (lm)	4150
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	77
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	54.00
Product Voltage (V)	118
Dimmable	Yes
Average life (Nominal) (h)	24000
Product EAN number	5410288027838

DATA TABLE

General data

Product name	54W/T5/865 FHO
Technology	Fluorescent
Watt (Rated) (W)	54
Lamp shape	Tube, double-ended
Type	T5 FHO Luxline Plus

T5 FHO Luxline Plus

54W/T5/865 FHO

0002783

Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4944508
E-number SE	8356562
E-number Norway	3800989

Optical data

Luminous flux (lm)	4150
Luminous flux (Rated) (lm)	4150
Luminous flux (Nominal) at 35°C (lm)	4650
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	77
Ambient temperature for maximum luminous flux (°C)	35
Colour temperature (K)	6500
Light colour	Daylight
Colour Code	865
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	0.97
Rated lumen maint. factor (%) at 4000 h 50Hz	0.95
Rated lumen maint. factor (%) at 6000 h 50Hz	0.93
Rated lumen maint. factor (%) at 8000 h 50Hz	0.92
Rated lumen maint. factor (%) at 12000 h 50Hz	0.91
Rated lumen maint. factor (%) at 16000 h 50Hz	0.90
Rated lumen maint. factor (%) at 20000 h 50Hz	0.88

Electrical data

Wattage (W)	54.00
Watt (Rated) - High frequency (W)	54.20
Current (A)	0.460
Product Voltage (V)	118
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Drive current (mA)	460
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	60

T5 FHO Luxline Plus

54W/T5/865 FHO

0002783

Lifetime data

Average life (Nominal) (h)	24000
Average life (Rated) (h)	24000
Rated survival factor (%) at 2000 h 50Hz	0.99
Rated survival factor (%) at 4000 h 50Hz	0.98
Rated survival factor (%) at 6000 h 50Hz	0.96
Rated survival factor (%) at 8000 h 50Hz	0.94
Rated survival factor (%) at 12000 h 50Hz	0.93
Rated survival factor (%) at 16000 h 50Hz	0.90
Rated survival factor (%) at 20000 h 50Hz	0.84

Physical data

Nominal Product Length (mm)	1150.0
Nominal Product Diameter (mm)	16
Max. Length base to base (mm) - A	1149.0
Length base to pin Min-Max (mm) - B	1153.7-1156.1
Max. Lamp Length (mm) - C/L	1163.2
Max. Lamp Diameter (mm) - D	17.0
Weight (kg)	0.083

Packaging


Single packaging type	Carton
Product EAN number	5410288027838
Packaging single length / height (cm)	116.4
Packaging single width (cm)	1.9
Packaging single depth (cm)	1.9
DUN14 (outer)	15410288027835
Units per outer package	25
Packaging outer length / height (cm)	118.0
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	10.5

Safety data


Lamp mercury content (mg)	2.30
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes

PHOTOMETRY


T5 FHO Luxline Plus
54W/T5/865 FHO
0002783

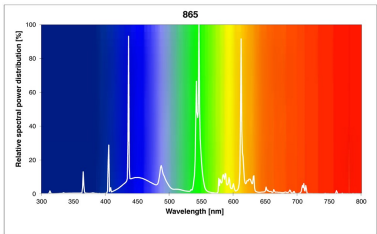

TECHNICAL DRAWINGS



0002783

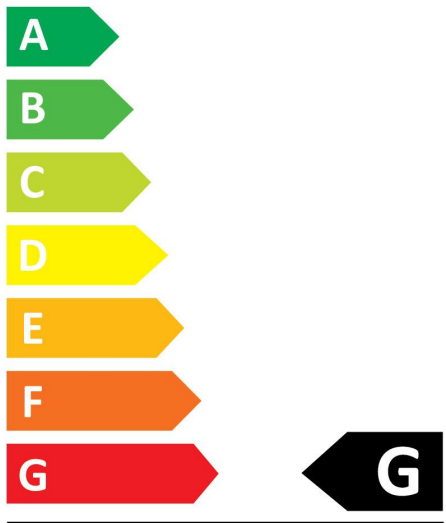


54
kWh/1000h



2019/2015

T5 FHO Luxline Plus
54W/T5/865 FHO
0002783

**ENERG**
SYLVANIA
0002783

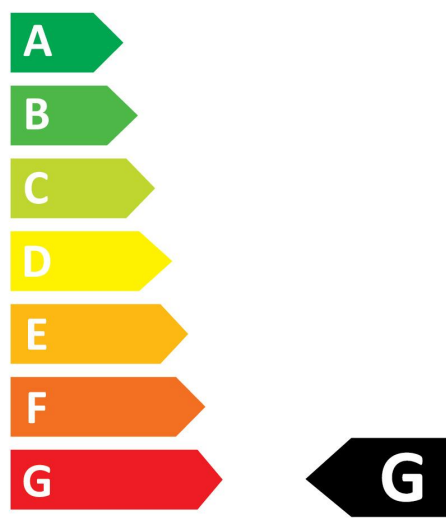

54
kWh/1000h

