

Hi-Spot 50

HS50 230V 40W 25° E14 SV1

0021081



Range Features

-

UV STOP



PRODUCT OVERVIEW

Lamp finish	Aluminium
Lamp shape	PAR 16
Colour temperature (K)	2700
CRI (Ra)	100
Dimmable	Yes
EAN code	5410288210810
Energy class	D
Cap/Base	E14
Beam angle(°)	25
Type	Hi-Spot 50-3
Watt (Nominal) (W)	40
Light colour	827 Homelight
Ordering number	0021081
Average life (Rated) (h)	2000
Luminous flux (Rated) (lm)	265
Technology	Halogen
Voltage (V)	230

DATA TABLE

General data

Average life (Nominal) (h)	2000
Control gear required	No
Lamp finish	Aluminium
Lamp shape	PAR 16
Dimmable	Yes
EAN code	5410288210810
Energy class	D
Energy saving lamp	No
Fixture rating	ff

Hi-Spot 50

HS50 230V 40W 25° E14 SV1

0021081

General application	Retail; Hospitality; Museums; Consumer; Residential;
IEC Reference	IEC 60357
IEC Reference 2	IEC 60432-2
IEC Reference 3	IEC 60630
Intended purpose	General lighting
Cap/Base	E14
Lamp mercury content (mg)	0
Type	Hi-Spot 50-3
No. of switching cycles before premature failure (min)	> 8000
Ordering number	0021081
Product name	HS50 230V 40W 25° E14 SV1
Average life (Rated) (h)	2000
Special purpose lamp	No
Starting time (max) (s)	0
Technology	Halogen
Transformer required	No
Sales pack quantity	15
Warm-up time to 60% of full light (max) (s)	Instant Full Light

Optical data

Colour temperature (K)	2700
CRI (Ra)	100
Beam angle(°)	25
Light colour	827 Homelight
Lumen maintenance at end of nominal life (%)	80
Luminous flux (Nominal) (lm)	265
Peak intensity (cd)	950
Luminous flux (Rated) (lm)	265
Suitable for accent lighting	Yes
Beam angle (Rated) (°)	25

Electrical data

Current (A)	23
kWh per 1000 hours burning time	40
Lamp power factor	1
Watt (Nominal) (W)	40
Watt (Rated) (W)	40

Hi-Spot 50

HS50 230V 40W 25° E14 SV1


0021081

Voltage (V) 230


Physical data

Max. Lamp Diameter (mm) - D	50
Lamp Length (mm) - C/L	77
Single packaging type	Box/Sleeve
Weight (kg)	0.06
Lamp dimension equal to filament lamp equivalent	Yes
Designed for optimum use in non standard conditions	No
Outer package dimensions (L x W x H) (cm)	25.50 x 15.50 x 8.80
Single package dimensions (L x W x H) (cm)	4.80 x 4.80 x 8.00

PHOTOMETRY

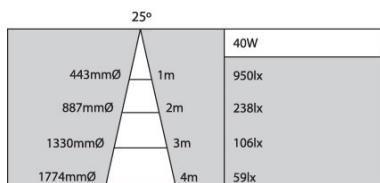

TECHNICAL DRAWINGS

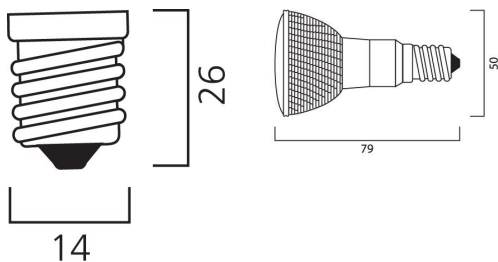

Hi-Spot 50

HS50 230V 40W 25° E14 SV1

0021081

