

PST - Electronic Ballast

PST T8 26mmØ 1x18W B2 ballast

0040164



Range Features

- Fibre-reinforced polyester body (GRP)
- Protection tube in PC
- Suitable for ceiling, pendant and horizontal wall mounting



PRODUCT OVERVIEW

Certifications	F-mark
Colour	White
EAN code	5410288401645
Housing	Glass fibre reinforced polyester
IK rating	IK05
IP rating	IP65
Lamps	1 x 18W T26 G13
Mount	Ceiling pendant Ceiling surface Wall surface
Ordering number	0040164
Voltage (V)	230
Compatible with bulbs of energy class:	A++ A+ A

DATA TABLE

Electrical data

Celma/IEE	B2
Electrical protection	Class II
Lamps	1 x 18W T26 G13
Leading trailing edge	No
Number of heads	1
Voltage (V)	230

General data

Certifications	F-mark
Control gear availability	Included

PST - Electronic Ballast

PST T8 26mmØ 1x18W B2 ballast

0040164

Control gear mounting	Integral
Control gear type	Magnetic
EAN code	5410288401645
Environment	Interior
General application	Garages maintenance areas Industrial
Housing	Glass fibre reinforced polyester
Mount	Ceiling pendant Ceiling surface Wall surface
National safety marks	ENEC
Ordering number	0040164
Range features	Fibre-reinforced polyester body (GRP) Protection tube in PC Suitable for ceiling, pendant and horizontal wall mounting
Product name	PST T8 26mmØ 1x18W B2 ballast
Special environment	Waterproof
Specific application	Parking / Car parks Warehouses
Sales pack quantity	1
E-number FI	4279304
Compatible with bulbs of energy class:	A++ A+ A

Physical data

Colour	White
Height (mm)	130
IK rating	IK05
IP rating	IP65
Lamp included	No
Length (mm)	654
Weight (kg)	1.30
Width (mm)	62
Outer package dimensions (L x W x H) (cm)	70.00 x 6.00 x 7.00
Single package dimensions (L x W x H) (cm)	70.00 x 6.00 x 7.00

Optical data


Distribution type	Direct
--------------------------	--------

PHOTOMETRY

PST - Electronic Ballast

PST T8 26mmØ 1x18W B2 ballast

0040164

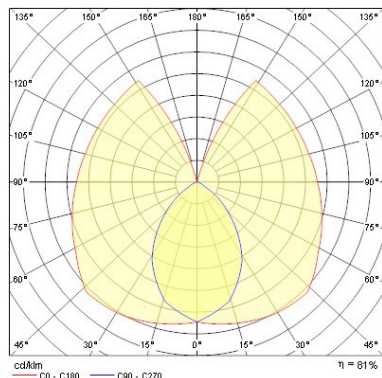

TECHNICAL DRAWINGS

