

Syl-Lighter CFL - 4,000K lamp

TC-DEL 2 x 18W G24q-2

3031520



Range Features

- Ideal for humid areas
- Glass cover and lamps included
- Quick and easy to install
- Uniform light distribution



PRODUCT OVERVIEW

Certifications	F-mark
Colour	White
Dimmable	No
EAN code	8711971315209
IP rating	IP44
Lamps	2x18W TC-DEL G24q-2
LOR (%)	51
Mount	Ceiling recessed
Ordering number	3031520
Voltage (V)	230
Compatible with bulbs of energy class:	A++ A+ A

DATA TABLE

General data

Certifications	F-mark
Control gear availability	Included
Control gear mounting	Remote
Control gear type	Electronic
Dimmable	No
EAN code	8711971315209
Environment	Interior
General application	Hospitality; Office
Mount	Ceiling recessed
Notes	Including lamp(s) type 840
Ordering number	3031520
Range features	Ideal for humid areas Glass cover and lamps included Quick and easy to install Uniform light distribution
Product name	TC-DEL 2 x 18W G24q-2

Syl-Lighter CFL - 4,000K lamp

TC-DEL 2 x 18W G24q-2

3031520

Specific application	Commercial Leisure Offices Public Buildings
Sales pack quantity	1
E-number SE	7472969
E-number FI	4272606
Compatible with bulbs of energy class:	A++ A+ A

Physical data

Colour	White
Cutout diameter (mm)	195
Cutout shape	Round
Diameter (mm)	220
Diffuser material	Glass
Emergency	Without
IP rating	IP44
Lamp included	Yes
Recessed depth (mm)	100
Weight (kg)	1.21
Outer package dimensions (L x W x H) (cm)	24.00 x 17.00 x 25.00
Single package dimensions (L x W x H) (cm)	24.00 x 17.00 x 25.00

Optical data

Distribution type	Direct - Symmetric
LOR (%)	51

Electrical data


Electrical protection	Class I
Glow wire test	850°C
Lamps	2x18W TC-DEL G24q-2
Number of heads	1
T Class max (°C)	-1
T Class min (°C)	-1
Total number of lamps	2
Voltage (V)	230

PHOTOMETRY

Syl-Lighter CFL - 4,000K lamp

TC-DEL 2 x 18W G24q-2


3031520

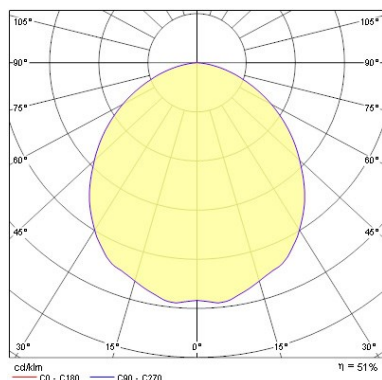

0.5	1.28	E07 E(C0) 51.9°	1987 222
1.0	2.55	E07 E(C0) 51.9°	494 55
1.5	3.83	E07 E(C0) 51.9°	206 25
2.0	5.10	E07 E(C0) 51.9°	116 14
2.5	6.38	E07 E(C0) 51.9°	74 9
3.0	7.65	E07 E(C0) 51.9°	52 5

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 103.8°)

TECHNICAL DRAWINGS



Lumiance 3031520

This luminaire is compatible with bulbs of the energy classes:

A++
A+
A
B
C
D
E

874/2012

This luminaire is compatible with bulbs of the energy classes:

A++
A+
A
B
C
D
E

This luminaire is sold with a bulb of the energy class:

Lumiance 3031520

874/2012