

## Syl-Lighter CFL - 4,000K lamp

TC-DEL 2 x 26w G24q-3

**3031530**



### Range Features

- Ideal for humid areas
- Glass cover and lamps included
- Quick and easy to install
- Uniform light distribution



## PRODUCT OVERVIEW

<b>Certifications</b>	F-mark
<b>Colour temperature (K)</b>	4000
<b>Colour</b>	White
<b>Dimmable</b>	No
<b>EAN code</b>	8711971315308
<b>IP rating</b>	IP44
<b>Lamps</b>	SA LYNX-DE 26W/840 G24Q-3 SLV
<b>LOR (%)</b>	42
<b>Mount</b>	Ceiling recessed
<b>Ordering number</b>	3031530
<b>Technology</b>	Compact Fluorescent
<b>Voltage (V)</b>	230
<b>Included lamp</b>	0025927
<b>Compatible with bulbs of energy class:</b>	A++ A+ A

## DATA TABLE

### General data

<b>Certifications</b>	F-mark
<b>Control gear availability</b>	Included
<b>Control gear mounting</b>	Remote
<b>Control gear type</b>	Electronic
<b>Dimmable</b>	No
<b>EAN code</b>	8711971315308
<b>Environment</b>	Interior
<b>General application</b>	Hospitality; Office
<b>Mount</b>	Ceiling recessed
<b>Notes</b>	Including lamp(s) type 840
<b>Ordering number</b>	3031530

## Syl-Lighter CFL - 4,000K lamp

TC-DEL 2 x 26w G24q-3

**3031530**

<b>Range features</b>	Ideal for humid areas Glass cover and lamps included Quick and easy to install Uniform light distribution
<b>Product name</b>	TC-DEL 2 x 26w G24q-3
<b>Specific application</b>	Commercial Leisure Offices Public Buildings
<b>Technology</b>	Compact Fluorescent
<b>Sales pack quantity</b>	1
<b>E-number SE</b>	7472971
<b>E-number FI</b>	4272608
<b>Compatible with bulbs of energy class:</b>	A++ A+ A

### Optical data

<b>Colour temperature (K)</b>	4000
<b>Distribution type</b>	Direct - Symmetric
<b>LOR (%)</b>	42

### Physical data

<b>Colour</b>	White
<b>Cutout diameter (mm)</b>	195
<b>Cutout shape</b>	Round
<b>Diameter (mm)</b>	220
<b>Diffuser material</b>	Glass
<b>Emergency</b>	Without
<b>IP rating</b>	IP44
<b>Lamp included</b>	Yes
<b>Recessed depth (mm)</b>	100
<b>Weight (kg)</b>	1.23
<b>Included lamp</b>	0025927
<b>Outer package dimensions (L x W x H) (cm)</b>	24.00 x 17.00 x 25.00
<b>Single package dimensions (L x W x H) (cm)</b>	24.00 x 17.00 x 25.00

### Electrical data



<b>Electrical protection</b>	Class I
<b>Glow wire test</b>	850°C
<b>Lamps</b>	SA LYNX-DE 26W/840 G24Q-3 SLV
<b>Number of heads</b>	1
<b>T Class max (°C)</b>	-1
<b>T Class min (°C)</b>	-1
<b>Total number of lamps</b>	2
<b>Total power consumption (W)</b>	52
<b>Voltage (V)</b>	230

## Syl-Lighter CFL - 4,000K lamp


TC-DEL 2 x 26w G24q-3

**3031530**

### PHOTOMETRY

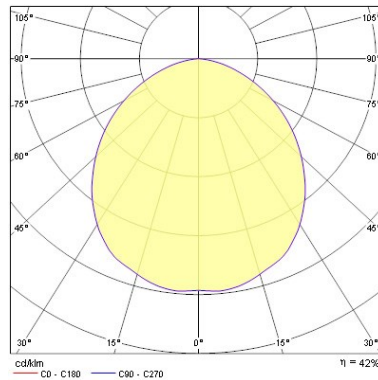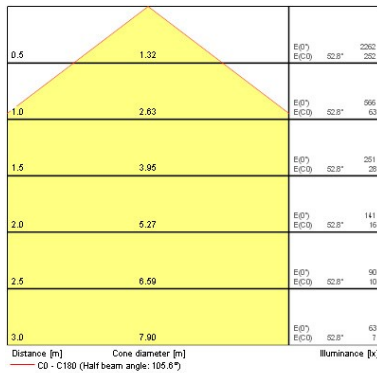

### TECHNICAL DRAWINGS




## Syl-Lighter CFL - 4,000K lamp



TC-DEL 2 x 26w G24q-3

**3031530**


**Lumiance**
3031530





This luminaire is compatible with bulbs of the energy classes:



This luminaire is sold with a bulb of the energy class:




874/2012




This luminaire is compatible with bulbs of the energy classes:

This luminaire is sold with a bulb of the energy class:



**Lumiance**
3031530
874/2012
