

Syl-Lighter CFL - 4,000K lamp

TC-DEL 1 x 26W G24q-3

3031580



Range Features

- Ideal for humid areas
- Glass cover and lamps included
- Quick and easy to install
- Uniform light distribution



PRODUCT OVERVIEW

Certifications	F-mark
Colour temperature (K)	4000
Colour	White
Dimmable	No
EAN code	8711971315803
IP rating	IP44
Lamps	SA LYNX-D 26W/840 G24D-3 SLV
LOR (%)	42
Mount	Ceiling recessed
Ordering number	3031580
Technology	Compact Fluorescent
Voltage (V)	230
Included lamp	0025915
Compatible with bulbs of energy class:	A++ A+ A

DATA TABLE

General data

Certifications	F-mark
Control gear availability	Included
Control gear mounting	Remote
Control gear type	Electronic
Dimmable	No
EAN code	8711971315803
Environment	Interior
General application	Hospitality; Office
Mount	Ceiling recessed
Notes	Including lamp(s) type 840
Ordering number	3031580

Syl-Lighter CFL - 4,000K lamp

TC-DEL 1 x 26W G24q-3

3031580

Range features	Ideal for humid areas Glass cover and lamps included Quick and easy to install Uniform light distribution
Product name	TC-DEL 1 x 26W G24q-3
Specific application	Commercial Leisure Offices Public Buildings
Technology	Compact Fluorescent
Sales pack quantity	1
E-number FI	4272614
Compatible with bulbs of energy class:	A++ A+ A

Optical data

Colour temperature (K)	4000
Distribution type	Direct - Symmetric
LOR (%)	42

Physical data

Colour	White
Cutout diameter (mm)	195
Cutout shape	Round
Diameter (mm)	220
Diffuser material	Glass
Emergency	Without
IP rating	IP44
Lamp included	Yes
Recessed depth (mm)	100
Weight (kg)	1.18
Included lamp	0025915
Outer package dimensions (L x W x H) (cm)	17.50 x 24.50 x 25.50
Single package dimensions (L x W x H) (cm)	17.50 x 24.50 x 25.50

Electrical data

Electrical protection	Class I
Glow wire test	850°C
Lamps	SA LYNX-D 26W/840 G24D-3 SLV
Number of heads	1
T Class max (°C)	-1
T Class min (°C)	-1
Total number of lamps	1
Total power consumption (W)	26
Voltage (V)	230

Syl-Lighter CFL - 4,000K lamp

TC-DEL 1 x 26W G24q-3


3031580

PHOTOMETRY


0.5	1.36	E(0°) E(C180)	53.6°	1640 172
1.0	2.71	E(0°) E(C180)	53.6°	410 43
1.5	4.07	E(0°) E(C180)	53.6°	182 19
2.0	5.43	E(0°) E(C180)	53.6°	103 11
2.5	6.78	E(0°) E(C180)	53.6°	66 7
3.0	8.14	E(0°) E(C180)	53.6°	48 5

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 107.2°)

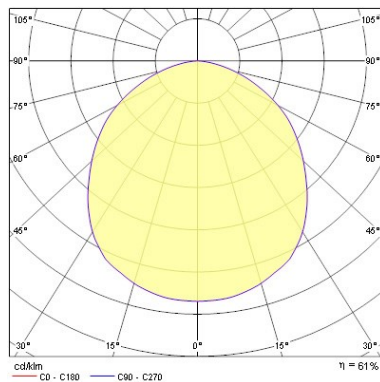

TECHNICAL DRAWINGS




Syl-Lighter CFL - 4,000K lamp


TC-DEL 1 x 26W G24q-3

3031580

Lumiance
3031580





This luminaire is compatible with bulbs of the energy classes:



This luminaire is sold with a bulb of the energy class:

A


874/2012




This luminaire is compatible with bulbs of the energy classes:

This luminaire is sold with a bulb of the energy class:

A

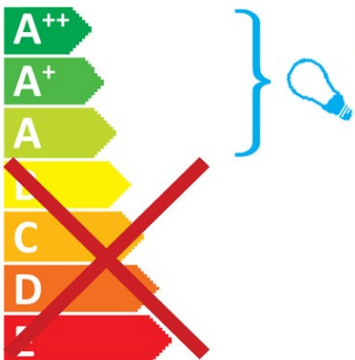

Lumiance
3031580
874/2012
