

DATENBLATT

N 5020

Niedervolt-Einbauleuchte zum Einbau in Möbel




Merkmale:

- Flache Möbeleinbauleuchte mit geringer Einbautiefe
- Lieferung inklusive Leuchtmittel




Technische Daten	Möbeleinbauleuchte				
Bezeichnung	N 5020				
Artikel Nr.	1850200203	1850200903	1850201003	1850201803	1850207903
Farbe	chrom	nickel-gebürstet	weiß	schwarz	gold
Oberfläche	galvanisiert	galvanisiert	lackiert	lackiert	galvanisiert
Leuchtmittel	QT9 Stiftsockellampe				
Fassung	G4				
Nennspannung	12V AC/DC				
Nennleistung	max. 10W				
Material	Stahl/Kunststoff/Glas satiniert				
Schutzklasse	III				
Schutzart	IP20				
Abmessungen (ØxH)	66x18 mm				
Deckenausschnitt (Ø)	58 mm				
Einbautiefe	18 mm				
Gewicht	60 g				
Leuchtenanschluss	30 cm Anschlussleitung mit AMP-Stecksystem 2-polig				
Abstand zur beleuchteten Fläche	mind. 0,3 m				
Prüfzeichen	MM				
CE-Konformität	ja				
Einbauhinweis	geeignet zur direkten Montage auf normal entflammaren Materialien				
Im Lieferumfang enthalten	Leuchtmittel, Anschlussleitung und Lampenfassung				

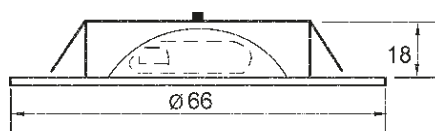

Zubehör (optional): **R 5020 Aufbauring**

Artikel Nr.	Bezeichnung
1850290200	R 5020 Aufbauring chrom
1850290900	R 5020 Aufbauring nickel-gebürstet
1850291000	R 5050 Aufbauring weiß
1850291800	R 5020 Aufbauring schwarz
1850297900	R 5020 Aufbauring gold

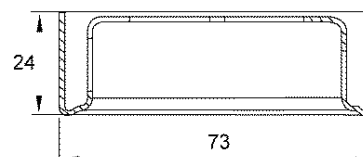

Technische Änderungen vorbehalten.

nobilé AG – Wächtersbacher Str. 78
D-60386 Frankfurt/M. Germany
Tel: +49 (0) 69/ 962205-0
www.nobile.de

nobile

rev. 0.1 – 03.09.2014

DATA SHEET

N 5020

Low-voltage recessed downlight for furniture use




Features:

- Flat downlight with a narrow installation depth
- Delivery including lamp




Specifications	Downlight for furniture use				
Type	N 5020				
Part no.	1850200203	1850200903	1850201003	1850201803	1850207903
Colour	chrome	brushed nickel	white	black	gold
Surface	galvanized	galvanized	painted	painted	galvanized
Light source	QT9 pin-base lamp				
Lamp holder	G4				
Rated voltage	12V AC/DC				
Rated power	max. 10W				
Material	steel/synthetic material/glass satined				
Safety class	III				
Protection class	IP20				
Dimensions (ØxH)	66x18 mm				
Ceiling cut-out (Ø)	58 mm				
Installation depth	18 mm				
Weight	60 g				
Connection of luminaire	30 cm cable with AMP plug-system 2-pole				
Distance to the lighted objects	min. 0.3 m				
Test marks	MM				
CE-Conformity	yes				
Installation note	suitable for direct mounting on normal flammable surfaces				
Included in delivery	lamp, connecting cable and lamp holder				

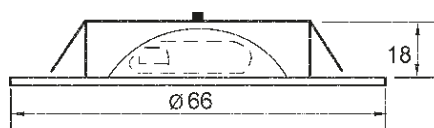

Accessories (optional): **R 5020 Surface mounted housing**

Part no.	Type
1850290200	R 5020 Surface mounted housing chrome
1850290900	R 5020 Surface mounted housing brushed nickel
1850291000	R 5020 Surface mounted housing white
1850291800	R 5020 Surface mounted housing black
1850297900	R 5020 Surface mounted housing gold

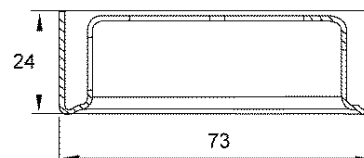

Specifications are subject to change without prior notice.