




### 7040 LED

Alimentatore elettronico dimmerabile a cursore, da pavimento per moduli LED a corrente costante CDT (vedi tabella). Per uso indipendente.

Floor dimmable electronic power supply unit with cursor for direct current LED modules CDT (see table). For independent use.

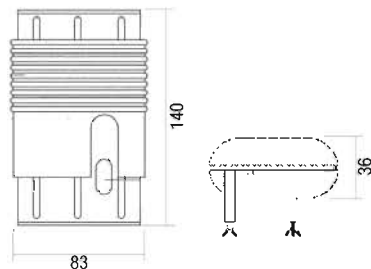

| Multi Powerled |            |           |           |       |     |           |          |          |     |              |
|----------------|------------|-----------|-----------|-------|-----|-----------|----------|----------|-----|--------------|
| Codice Code    | LPH<br>↓mm | Vdc<br>IN | Vac<br>IN | Hz    | 18A | IC        | ta<br>°C | tc<br>°C | PFC | Euro<br>Cad. |
| RL4720/Led     | 140x83x36  | 176-264   | 110-240   | 50/60 | 25  | 20A 170μS | 0..35    | 85       | OK  |              |

|                       |         | CDT  |      |      |        |         |         |         |         |         |         |         |         |         |         |         |         |
|-----------------------|---------|------|------|------|--------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Iout                  | mA      | 300  | 350  | 400  | 450    | 500     | 550     | 600     | 650     | 700     | 750     | 800     | 850     | 900     | 950     | 1000    | 1050    |
| Vout                  | Vdc     | 48   | 48   | 48   | 48     | 48      | 48      | 48      | 48      | 48      | 48      | 48      | 48      | 48      | 48      | 48      | 48      |
| Power                 | W       | 14   | 17   | 19   | 21(20) | 24 (20) | 26 (20) | 28 (20) | 30 (20) | 32 (20) | 34 (20) | 36 (20) | 38 (20) | 40 (20) | 40 (20) | 40 (20) | 40 (20) |
| N° LED*               | min-max | 1÷15 | 1÷15 | 1÷15 | 1÷15   | 1÷15    | 1÷15    | 1÷15    | 1÷14    | 1÷14    | 1÷14    | 1÷14    | 1÷14    | 1÷14    | 1÷13    | 1÷13    | 1÷12    |
| * LED typical VF 3,2V |         | COB  |      |      |        |         |         |         |         |         |         |         |         |         |         |         |         |

### Norme di riferimento

#### Reference norms

EN 55015  
EN 61000-3-2  
EN 61000-3-3  
EN 61347-1  
EN 61347-2-13  
EN 61547  
EN 62384

### Caratteristiche tecniche

- Alimentatore multipotenza dimmerabile fornito di dip-switch per la selezione della corrente in uscita.
- Regolazione a cursore.
- Accensione e spegnimento con interruttore.
- Alimentatore indipendente IP20, per uso interno.
- Protetto in classe II contro le scosse elettriche per contatti diretti e indiretti.
- Uscita in corrente costante (CDT).
- Protezioni:  
al cortocircuito;  
contro le extra-tensioni di rete;  
contro i sovraccarichi.
- Morsetti di entrata e uscita sullo stesso lato.
- CDT connessione moduli led in serie
- Colore: Nero, a richiesta colore trasparente, (4740/Led).

### Technical features

- Dimmable multipower power supply unit equipped with a dip-switch to select the output current.
- Cursor adjustment.
- Switch on and off with switch.
- IP20 independent power supply unit, for indoor use.
- Class II protection against electric shocks by direct and indirect contact.
- Constant current output (CDT).
- Protections:  
against short circuit;  
against extra network voltage;  
against overloads.
- Input and output terminals on the same side.
- LED modules CDT connection in series
- Colour: Black, transparent colour (4740/Led) on request.



### Esempio applicativo - Application example

