

DATENBLATT

C 411

Einbauleuchte für Sternenhimmel





Merkmale:

- Filigraner Lichtpunkt zur Gestaltung eines Sternenhimmels und zur individuellen Effektbeleuchtung
- Hochwertige Verarbeitung
- Aufgrund der geringen Bauhöhe auch für Hohlräume mit geringer Einbautiefe geeignet
- Federn sind aus echtem Federstahl dadurch unempfindlich gegen Abnutzung und extrem langlebig
- Fassung und Kabel VDE geprüft
- In 7 Farben lieferbar
- Die Leuchte C 411 kann auch mit einer LED Stiftsockellampe ausgerüstet werden



Technische Daten	Einbauleuchte			
Bezeichnung	C 411			
Artikel Nr.	1755200100	1755200200	1755201000	1755201400
Farbe	chrom-matt	chrom	weiß	Edelstahl
Oberfläche	galvanisiert	galvanisiert	pulverbeschichtet	AISI 303
Artikel Nr.	1755201800	1755204100	1755207900	
Farbe	schwarz	titan-matt	gold 24 Karat	
Oberfläche	pulverbeschichtet	pulverbeschichtet	vergoldet	
Für Leuchtmittel	QT9 Stiftsockellampe/LED Stiftsockellampe			
Fassung	G4			
Nennspannung	12V AC/DC			
Nennleistung	max. 10W			
Material	Messing bzw. Edelstahl (AISI 303)			
Schutzklasse	III			
Schutzart	IP20			
Außendurchmesser	30 mm			
Einbaudurchmesser	25 mm			
Einbautiefe	28 mm			
Gewicht	50 g			
Abstand zur beleuchteten Fläche	mind. 0,3 m			
Prüfzeichen	 Einbauleuchte nicht geeignet zur direkten Montage an normal entflammaren Materialien  Einbau an normal entflammaren Materialien nur in Verbindung mit einem LED Leuchtmittel  VDE-EMC			
CE-Konformität	ja			
Hinweis	beim Einbau auf ein Minimum an Konvektion achten und nicht mit Isoliermaterial abdecken			
Im Lieferumfang enthalten	Lampenfassung und Kabel (30 cm) VDE geprüft, 250°C			

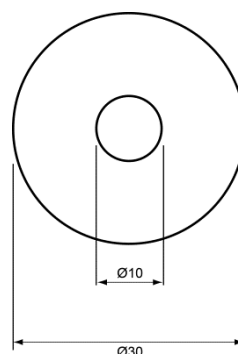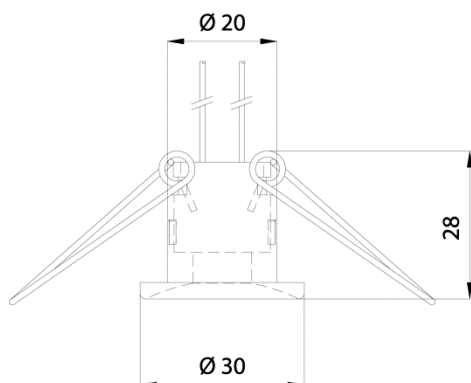

Technische Änderungen vorbehalten.

DATA SHEET

C 411

Recessed downlight for starry sky





Features:

- Filigrane light-point to create a starry night effect or for individual effect lighting
- High-quality finishing
- The low construction allows an installation in minimal mounting depth
- Springs are of genuine spring steel and thereby protected against wear and extremely durable
- Lamp holder and cable approved by VDE
- Available in 7 colours
- The downlight C 411 can easily be fitted with an LED pin-base lamp



Specifications	Recessed downlight			
Type	C 411			
Part no.	1755200100	1755200200	1755201000	1755201400
Colour	matt chrome	chrome	white	stainless steel
Surface	galvanized	galvanized	powder-coated	AISI 303
Part no.	1755201800	1755204100	1755207900	
Colour	black	matt titanium	gold 24 kt.	
Surface	powder-coated	powder-coated	gold-plated	
For light source	QT9 pin-base lamp/LED pin-base lamp			
Lamp holder	G4			
Rated voltage	12V AC/DC			
Rated power	max. 10W			
Material	brass resp. stainless steel (AISI 303)			
Safety class	III			
Protection class	IP20			
Outer diameter	30 mm			
Ceiling cut-out	25 mm			
Installation depth	28 mm			
Weight	50 g			
Distance to the lighted objects	min. 0.3 m			
Test marks	 Recessed luminaire not suitable for direct mounting on normal flammable surfaces  Installation on normal flammable material only in conjunction with an LED lamp  VDE-EMC			
CE-Conformity	yes			
Note	ensure constant convection and do not cover by insulation material			
Included in delivery	lamp holder and cable (30 cm) approved by VDE, 250°C			

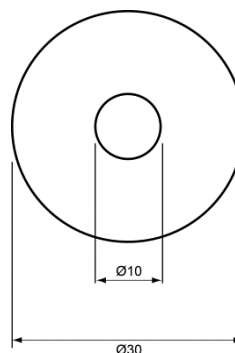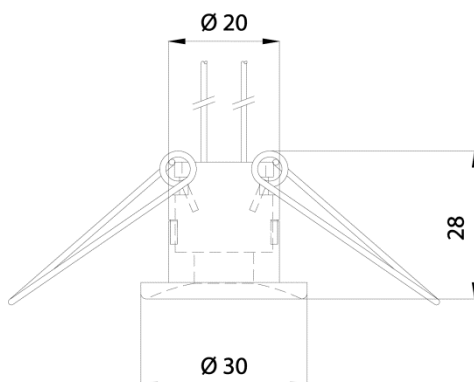

Specifications are subject to change without prior notice.