


SMART UV TUBE 110

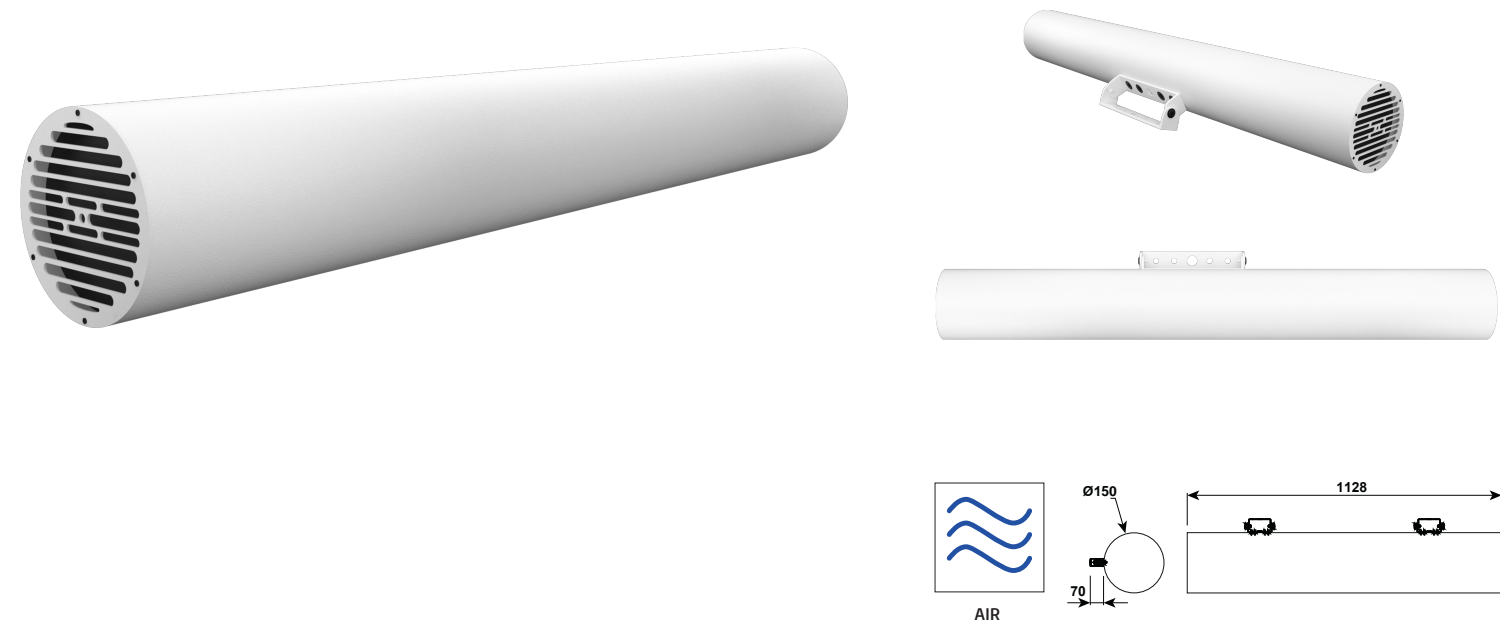

Available in RAL9016 (white) and RAL9005 (black)

Coverage area:	up to 35 m2
Power:	220-240V 50/60Hz
UVC on HF gear:	min. 40 W (in chamber flow)
Mass:	ca. 6 kg
Fan performance:	160 m3/h
Fan loudness:	max 40dB (from 1 meter)
Recommended uptime:	24h
Radiators replacement:	once a year
Mounting:	wall, ceiling or tripod
Radiator:	2x 55W Philips radiator (253,7nm)
Air filter replacement:	depending on the usage (twice a year recommended)

Description:	Air disinfection and prevention of secondary infections. Eliminates bacteria, viruses, fungi, molds. Thanks to patent-pending internal UV bulkheads and custom fans Smart Tube is able to achieve outstanding airflow results with low noise.
Applications:	Use in production halls, health care facilities, pharmacies, public transport, shops and many more
Accessories:	wireless control (ordered separately)

