

SYLVANIA



Slim and compact LED Floodlight



START Flood

The START Flood IP65 range of LED Floodlights features a stylish and slim body, made of durable and lightweight die-cast aluminium. It can be used to provide additional safety and security lighting for home exterior areas, such as gardens, pathways, driveways and garages.

The Floodlights includes a 1m pre-wired power cable and fitting bracket for quick and easy installation. The universal mounting bracket allows for wall and surface mounting with the possibility of vertical tilting.

The range includes models that also feature a passive infrared sensor (PIR), which is tiltable for better adjustment of detection areas.

Available in a wide range of lumen packages from 1000 lumens up to 10,000 lumens, warm white (3000K), neutral white (4000K) and cool white (6500K) colour temperature and black metal casing.

sylvania-lighting.com

START Flood IP65



Features

- Slim LED exterior floodlight with/ without PIR
- Lightweight, durable, die-cast aluminium body
- Universal mounting bracket allows wall or surface mounting with the possibility of tilting upwards or downwards
- Possibility to tilt the sensor
- Sensor: adjustable lux (5 to 2000 lux) and time levels (10 secs to 8 min)
- Quick and easy to install with 1m pre-wired stripped cable and fitting bracket
- Higher lumen packages up to 10.000lm - 128 lm/W efficacy
- Available in 3000K, 4000K and 6500K
- CRI >80
- 1.000 - 7.000lm: IK06, 10.000lm: IK07 impact proof, sensor: IK05
- Operating temperature range: -20 to +40°C
- L70B50 Lifespan: 90,000 hrs (≤3.000lm) / 120,000 hrs (>3.000lm)
- 3 year warranty

Product information

Code	Description	System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	IP Rating	IK Rating	Colour Temperature (K)	Lifespan L70:B50	Weight
Start Flood IP65									
0050160	Start Flood IP65 1000lm 830 Black	9.5	1000	105	IP65	IK06	3000	90,000	0.26
0050161	Start Flood IP65 1000lm 840 Black	9.5	1000	105	IP65	IK06	4000	90,000	0.26
0050174	Start Flood IP65 2000lm 840 Black	17	2000	118	IP65	IK06	4000	90,000	0.26
0050162	Start Flood IP65 3000lm 830 Black	26	3000	115	IP65	IK06	3000	90,000	0.325
0050163	Start Flood IP65 3000lm 840 Black	26	3000	115	IP65	IK06	4000	90,000	0.325
0050171	Start Flood IP65 3000lm 865 Black	26	3000	115	IP65	IK06	6500	90,000	0.325
0050164	Start Flood IP65 5000lm 830 Black	42	5000	119	IP65	IK06	3000	120,000	0.445
0050165	Start Flood IP65 5000lm 840 Black	42	5000	119	IP65	IK06	4000	120,000	0.445
0050172	Start Flood IP65 5000lm 865 Black	42	5000	119	IP65	IK06	6500	120,000	0.445
0050166	Start Flood IP65 7000lm 840 Black	58	7000	121	IP65	IK06	4000	120,000	0.665
0050175	Start Flood IP65 10000lm 830 Black	78	10000	128	IP65	IK07	3000	120,000	1.135
0050167	Start Flood IP65 10000lm 840 Black	78	10000	128	IP65	IK07	4000	120,000	1.135
0050173	Start Flood IP65 10000lm 865 Black	78	10000	128	IP65	IK07	6500	120,000	1.135
0050168	Start Flood IP65 PIR 1000lm 840 Black	10.5	1000	95	IP65	IK05	4000	90,000	0.39
0050176	Start Flood IP65 PIR 3000lm 830 Black	27	3000	111	IP65	IK05	3000	90,000	0.393
0050169	Start Flood IP65 PIR 3000lm 840 Black	27	3000	111	IP65	IK05	4000	90,000	0.393
0050177	Start Flood IP65 PIR 5000lm 830 Black	43	5000	116	IP65	IK05	3000	120,000	0.515
0050170	Start Flood IP65 PIR 5000lm 840 Black	43	5000	116	IP65	IK05	4000	120,000	0.515


START Flood IP65



Additional Images




Photometric Data



Start Flood IP65

Dimensions (mm)

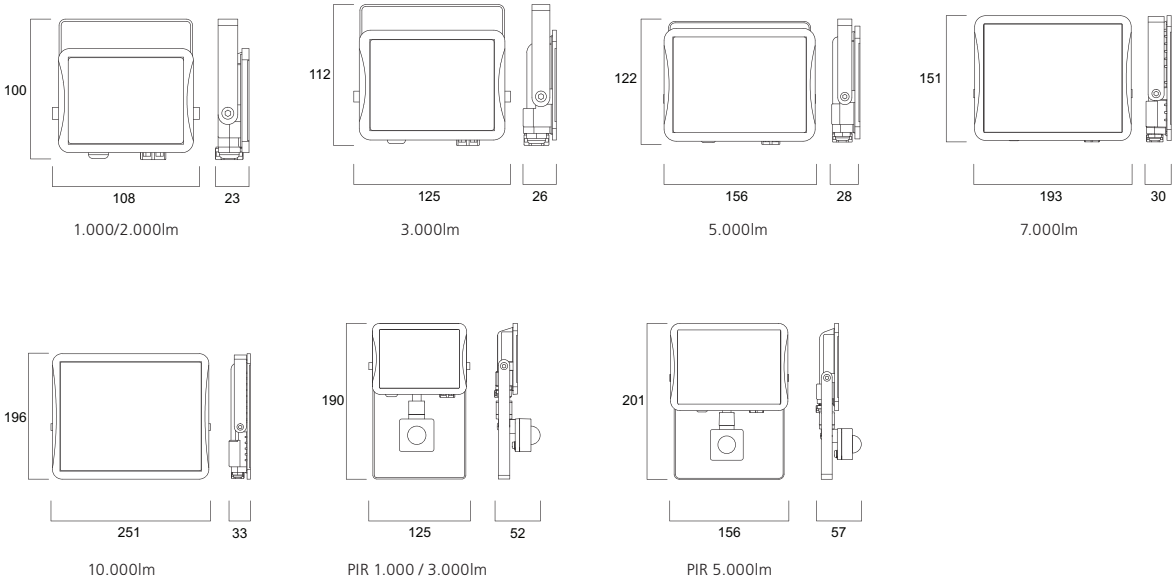

SYLVANIA



Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania International Group.

Copyright Feilo Sylvania International Group. June 2024

sylvania-lighting.com

A Feilo Sylvania Company