

Hi Spot 120 Superia Extralife

HS120 SU 230V 75W 30° E27 SV1

0021141



Range Features

-



UV STOP



PRODUCT OVERVIEW

Lamp finish	Aluminium
Lamp shape	PAR 38
Colour temperature (K)	2900
CRI (Ra)	100
Dimmable	Yes
EAN code	5410288211411
Energy class	D
Equivalent watt (W)	93
Cap/Base	E27
Beam angle(°)	30
Type	Hi-Spot 120 Superia
Watt (Nominal) (W)	75
Light colour	829 Warm white
Ordering number	0021141
Average life (Rated) (h)	3000
Luminous flux (Rated) (lm)	700
Technology	Halogen
Voltage (V)	230

DATA TABLE

General data

Average life (Nominal) (h)	3000
Control gear required	No
Lamp finish	Aluminium
Lamp shape	PAR 38
Dimmable	Yes

Hi Spot 120 Superia Extralife

HS120 SU 230V 75W 30° E27 SV1

0021141

EAN code	5410288211411
Energy class	D
Energy saving lamp	No
Fixture rating	Open
General application	Retail; Hospitality; Museums; Consumer; Residential;
IEC Reference	IEC 60357
IEC Reference 2	IEC 60432-2
IEC Reference 3	IEC 60630
Intended purpose	General lighting
Cap/Base	E27
Lamp mercury content (mg)	0
Type	Hi-Spot 120 Superia
No. of switching cycles before premature failure (min)	>12000
Ordering number	0021141
Product name	HS120 SU 230V 75W 30° E27 SV1
Average life (Rated) (h)	3000
Special purpose lamp	No
Starting time (max) (s)	0
Technology	Halogen
Transformer required	No
Sales pack quantity	15
Warm-up time to 60% of full light (max) (s)	Instant Full Light

Optical data

Colour temperature (K)	2900
CRI (Ra)	100
Beam angle(°)	30
Light colour	829 Warm white
Lumen maintenance at end of nominal life (%)	80
Luminous flux (Nominal) (lm)	700
Peak intensity (cd)	2200
Luminous flux (Rated) (lm)	700
Suitable for accent lighting	Yes
Beam angle (Rated) (°)	30

Electrical data

Current (A)	0.326
--------------------	-------

Hi Spot 120 Superia Extralife

HS120 SU 230V 75W 30° E27 SV1

0021141

Equivalent watt (W)	93
kWh per 1000 hours burning time	75
Lamp power factor	1
Watt (Nominal) (W)	75
Watt (Rated) (W)	75
Voltage (V)	230


Physical data

Max. Lamp Diameter (mm) - D	122
Lamp Length (mm) - C/L	136
Single packaging type	Box/Sleeve
Weight (kg)	0.31
Lamp dimension equal to filament lamp equivalent	Yes
Designed for optimum use in non standard conditions	No
Outer package dimensions (L x W x H) (cm)	62.00 x 38.00 x 17.00
Single package dimensions (L x W x H) (cm)	14.00 x 11.40 x 11.40

PHOTOMETRY

10°	75W 100W	30°	75W 100W
175mm x 1m	6900 x 10000 x	530mm x 1m	2200 x 3500 x
350mm x 2m	1720 x 2500 x	1070mm x 2m	500 x 870 x
525mm x 3m	767x 1111 x	1600mm x 3m	240 x 380 x
700mm x 4m	433x 625x	2140mm x 4m	138x 218x

TECHNICAL DRAWINGS

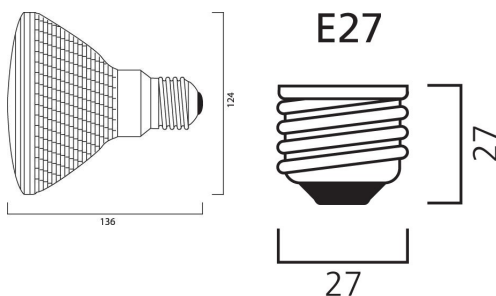

Hi Spot 120 Superia Extralife

HS120 SU 230V 75W 30° E27 SV1

0021141

